



固定轴式直线步进电机

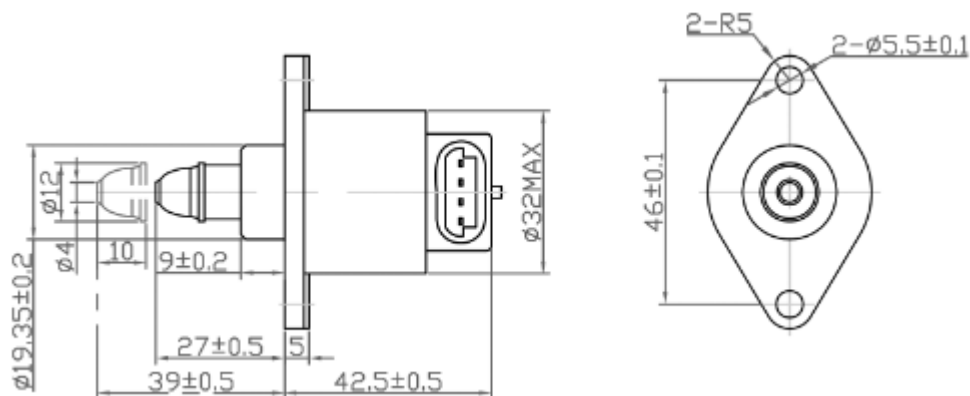

Dimensions unit=mm



STEP	A	B	\bar{A}	\bar{B}
1	-	-	-	-
2	-	-	-	-
3	-	-	-	-
4	-	-	-	-
5	-	-	-	-

32YCZ-F5184

Electrical Data		电气数据	Condition	条件
1	Rated Voltage	额定电压	12VDC	
2	Resistance per Phase, $\pm 10\%$	每相电阻	53 Ω	@20°C
3	Inductance per Phase, $\pm 20\%$	每相电感	23.5 mH	@1kHz
4	Rated Current per Phase	每相额定电流	0.23 A	
5	Linear Travel Step	直线步进电机步长	0.042 mm/Step	
6	Max Force	最大推力	35N	@100 pps /Chopper 24VDC
7	Maximum travel	最大行程	13.2 mm	
8	Step Angle	步距角	15°	
9	Ambient Temperature Range	环境温度范围	-40 to +125°C	
10	Insulation Resistance	绝缘电阻	100 M Ω	
11	Protection Rate	防护等级	IP54	
12	Weight	重量	120g	
13	Leadwire	引线规格		

以上双极性马达仅为代表性产品，我们可按客户要求提供不同电压，电流的单极性和双极性马达产品