



固定轴式直线步进电机

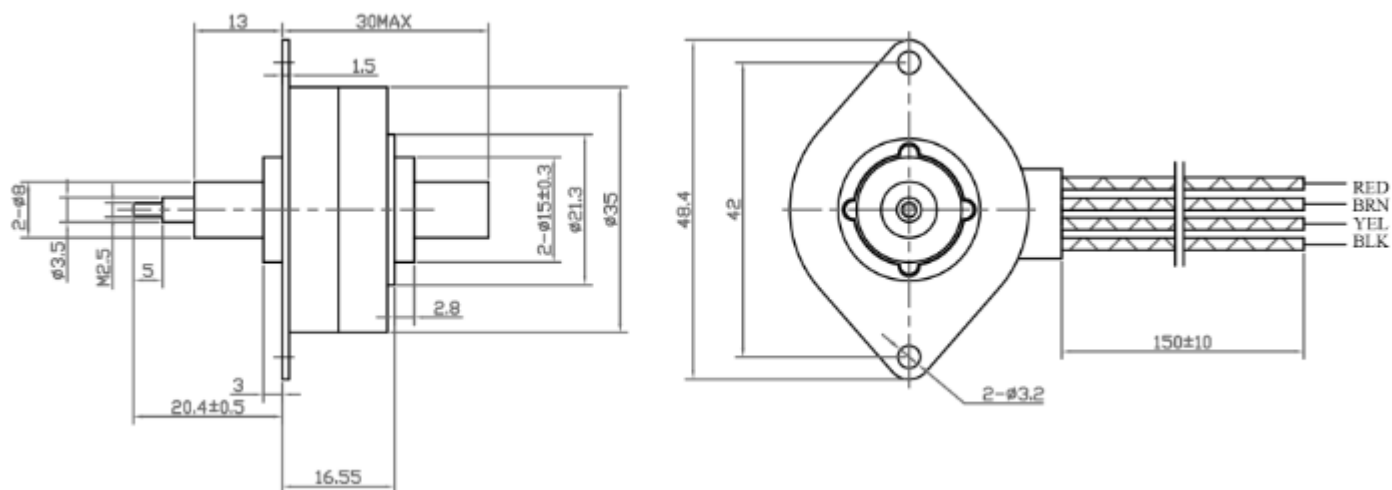

Dimensions unit=mm

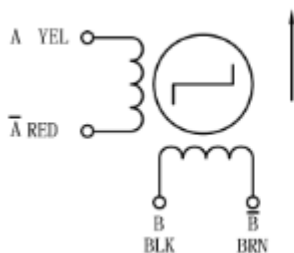

Pin No.	WIRE COLOR	STEP			
		1	2	3	4
1	BLK	-	-		
2	BRN			-	-
3	YEL	-			-
4	RED		-	-	

35YC16Z-02

Electrical Data		电气数据	Condition 条件
1	Rated Voltage	额定电压	5VDC
2	Resistance per Phase, ±10%	每相电阻	7.7 Ω @20°C
3	Inductance per Phase, ±20%	每相电感	8.1 mH @1kHz
4	Rated Current per Phase	每相额定电流	0.5 A
5	Linear Travel Step	直线步进电机步长	0.0167 mm/Step
6	Max Force	最大推力	140N @100 pps /Chopper 24VDC
7	Maximum travel	最大行程	14 mm
8	Step Angle	步距角	7.5°
9	Ambient Temperature Range	环境温度范围	-40 to +125°C
10	Insulation Resistance	绝缘电阻	100 MΩ
11	Protection Rate	防护等级	IP50
12	Weight	重量	84 g
13	Leadwire	引线规格	UL1061 28#

*以上双极性马达仅为代表性产品，我们可按客户要求提供不同电压，电流的单极性和双极性马达产品。

*马达的螺纹端部结构可提供 4 种螺纹选择：#4-40 UNC-2A THREAD, M3 X 0.5 (METRIC) THREAD, #2-56 UNC-2A THREAD, M2 X 4 (METRIC) THREAD